
Flemmard Documentation

Release 1.0

Mozilla Services

CONTENTS

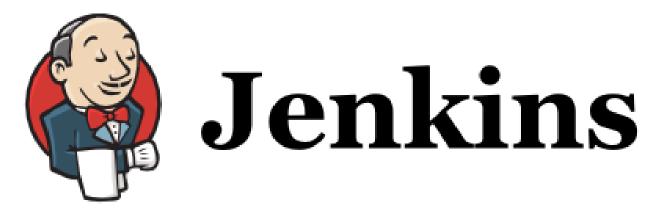

Flemmard is a script you can use to drive Jenkins from the command line.

The script let you:

- build jobs with specific tags
- · download artifacts
- create new jobs using a job template
- list jobs and their status

CONTENTS 1

2 CONTENTS

CHAPTER

ONE

INSTALLATION

Make sur you have pip installed, then

\$ pip install flemmard

CHAPTER

TWO

USAGE

Flemmard provides a command-line script called ... **flemmard** that comes with actions:

- **list** Lists all jobs.
- status Gives a job status
- **build** Build a job.
- create Create a new Job
- **artifacts** Lists the artifacts.

For every action, you can specify the Jenkins root URL with -url, or add a *.flemmardrc* file into your home directory to set up a default value:

```
[flemmard]
url = http://jenkins.example.com
```

Using *-url* explicitely will override any value found in *.flemmardrc*.

6 Chapter 2. Usage

CHAPTER

THREE

USEFUL LINKS

 $\bullet \ \ Repository: https://github.com/mozilla-services/flemmard$